

# Sartopure GF Plus

## Adsorptive High Capacity Filter Cartridges



### Description

Sartopure GF Plus cartridges are optimized for the protection of downstream membrane filter systems and clarification in food and beverage applications. Due to their high adsorptive power by glass fiber fleeces, they are the ideal solution for removal of colloids from beverages.

### Applications

Sartopure GF Plus are ideal for the prefiltration of:

- Water
- Wine
- other beverages

### High Adsorption

Based on electrostatic forces of attraction, the negatively charged glass fiber material retains positively charged, small particles that would otherwise pass through the filter. These particles can even be smaller than the nominal filter retention rate.

### Defined Retention Rates

The key feature of Sartopure GF Plus cartridges is their defined and accurate retention rating >99.9%!

### High Profitability

The cartridges' high flow rates at a low differential pressure reduce overall costs as less energy is used. Moreover, a high total throughput guarantees the maximum in process profitability.

### Flexibility

Sartopure GF Plus filters are available as standard filter cartridges.

### Documentation

Sartopure GF Plus cartridges are designed, developed and manufactured in accordance with a ISO 9001 certified Quality Management System.

### Specifications

#### Materials

Filter Material:	Glass Fiber Fleeces
Support Fleece:	Polypropylene
Core:	Polypropylene
End Caps:	Polypropylene
O-Rings:	Silicone (optional EPDM or Viton)

#### Retention Rates

0.65 µm, 1.2 µm

#### Available Sizes | Filtration Area

#### Cartridges

Size 1	10"	0.6 m <sup>2</sup>   6 ft <sup>2</sup>
Size 2	20"	1.2 m <sup>2</sup>   12 ft <sup>2</sup>
Size 3	30"	1.8 m <sup>2</sup>   18 ft <sup>2</sup>

#### Available Adapters Cartridges

21, 25, 27, 28

#### Operating Parameters

Max. Allowable Differential Pressure:	5 bar   75 psi at 20 °C
	2 bar   29 psi at 80 °C
Max. Allowable Back Pressure:	2 bar   29 psi at 20 °C

## Depth Filter Cartridges

### Sterilization

#### In-Line Steam Sterilization

134 °C, 20 min. at max differential pressure of 0.5 bar | 7 psi


#### Sterilization Cycles

In-Line Sterilization: Min. 25

#### Order Information

Order Code	Pore Size [µm]
<b>Cartridges:</b>	
555**05PX	0.65
555**03PX	1.2

Water Flow Rates for Sartopure GF Plus 10" Standard Cartridges 0.65 µm, 1.2 µm

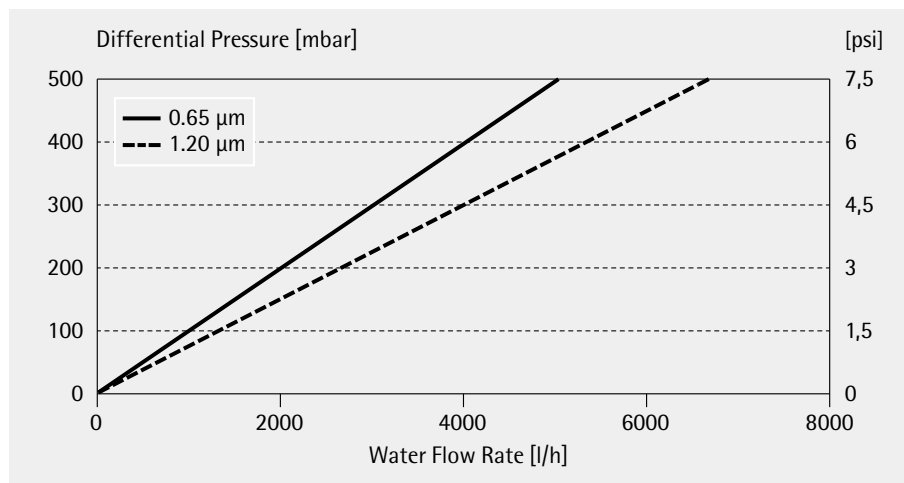

Sartorius AG  
Weender Landstrasse 94–108  
37075 Goettingen, Germany

Phone +49.551.308.0  
Fax +49.551.308.3289  
www.sartorius.com

USA +1.631.2544249  
UK +44.1372.737100  
France +33.1.69192100  
Italy +39.055.634041  
Spain +34.91.3586100  
Japan +81.3.33293366

Specifications subject to change  
without notice.

Printed and copyrighted  
by Sartorius · W/sart-000 · G  
Publication No.: SGK2007-e04041  
Order No.: 85030-519-91